


INSTALLATION INSTRUCTIONS MARSHALLS RT\RD4 TELESCOPIC BOLLARDS

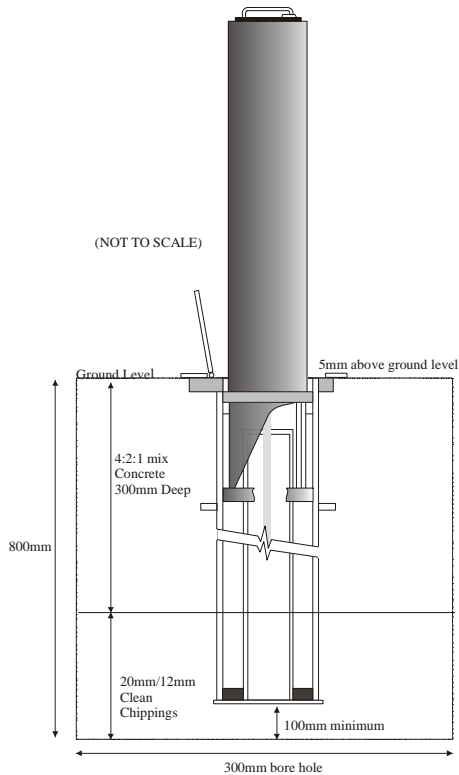

Determine position of installation. Recommended distance between centres: 1250mm, maximum 1400mm.

Break surface and bore hole 800mm deep by 300mm diameter.

Fill hole with approx. 100mm of 20mm/12mm clean chippings.

Lower post onto chippings and check height. Lid of post should be 5mm above ground level.

Add or remove aggregate until desired height is obtained.

Position post central in bore hole and add more chippings until post stands unaided.

Withdraw sliding post and manoeuvre into vertical position using a spirit level.

Add more chippings until approximately 300mm from surface.

Fill remainder of hole with 4:2:1 concrete mix and smooth off neatly to lid surround, leaving slight fall away. Groundworks variable depending on site conditions.

Finally check again using a spirit level and retract post gently into ground and lock.

Leave for 24 hours before operating.

Keep upper post clean during fitting procedure.

When lowering post do so in controlled manner. Do not allow it to free-fall down into base.

Groundworks variable depending on site conditions.

Maintenance

Keep Sliding Post clean.

Flush out and lubricate lock with WD40 or similar weekly.

Always close cover plate after use.

WARNING

FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY CAUSE MALFUNCTION OF THE POST AND INVALIDATION OF YOUR WARRANTY. PLEASE ADHERE TO THEM.

SALES OFFICE:

Marshalls Street Furniture, Adlington Estate, Adlington, Cheshire SK10 4NL

Tel: 0870 6002425 Fax: 0870 6002426

**OPERATING INSTRUCTIONS
MARSHALLS TELESCOPIC BOLLARDS**

TO LOCK

LIFT LID, DRAW UP INNER POST TO FULL EXTENT.
ROTATE HANDLE CLOCKWISE QUARTER TURN.
PRESS DOWN PUSH BUTTON LOCK

TO UNLOCK

RELEASE PUSH BUTTON LOCK WITH KEY.
RETURN KEY TO ORIGINAL POSITION DEPRESSING KEY SLIGHTLY AND REMOVE
ROTATE HANDLE QUARTER TURN ANTICLOCKWISE.
WHEN LOWERING POST DO SO IN A CONTROLLED MANNER.
DO NOT ALLOW IT TO FREE FALL DOWN INTO BASE.

TO LOCK IN LOWERED POSITION, ROTATE HANDLE QUARTER TURN
ANTICLOCKWISE.
PRESS DOWN PUSH BUTTON LOCK.

OPERATING WEIGHTS

DRIVEWAY (RT\RD4) 6KG
STANDARD ROUND (RT\R5) 11.5KG
STANDARD SQUARE (RT\SQ5) 13KG
HEAVY DUTY ROUND (RT\R8) 14.5KG
HEAVY DUTY SQUARE (RT\SQ8) 15KG
LARGE ROUND (RT\R14) 17KG
HEAVY DUTY LARGE ROUND (RT\R14\10) 22KG
STAINLESS STEEL (RT\SS5) 17KG
RHINOCAST (RT\SU5) 16KG

ALWAYS ADHERE TO THE HSE SAFE LIFTING GUIDELINES.

WEEKLY MAINTENANCE

KEEP SLIDING POST CLEAN.
FLUSH OUT AND LUBRICATE LOCK WITH WD40 OR SIMILAR.

INSTALLATIONS WITH HIGH WATER TABLES OR ADVERSE CONDITIONS SHOULD BE
CHECKED DAILY.

ALWAYS CLOSE COVER PLATE AFTER USE ENSURING HINGE IS CLEAR OF DEBRIS.

SALES OFFICE:
MARSHALLS STREET FURNITURE, ADLINGTON ESTATE, ADLINGTON, CHESHIRE
SK10 4NL TEL: 0870 6002425 FAX 0870 6002426